
ELEVA E LINE

MACHINE-ROOMLESS ELEVATOR SYSTEMS



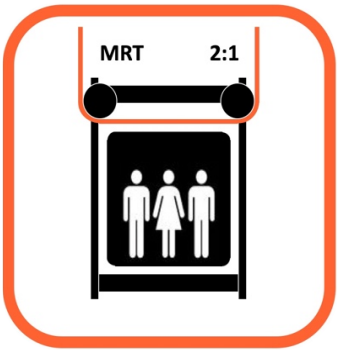


www.evatek.com.tr

Evatek Asansör Sanayi ve Ticaret Limited Şirketi

Gençlik Cad. No. 52 Taşdelen 34778 Çekmeköy / İstanbul
T +90 (216) 466 00 33 F +90 (216) 466 02 99 info@evatek.com.tr

INDEX

INDEX			
SYSTEM OVERVIEW			PAGE **3**
COMPONENTS			PAGE **4**
CAR MODELS	**MIA**	STAINLESS STEEL / SATIN	PAGE **5**
	BEO	SAFETY GLASS / PURE WHITE	PAGE **5**
	LIN	STAINLESS STEEL / SUPER MIRROR STRIPED	PAGE **5**
	ZEN	SAFETY GLASS / BRONZE	PAGE **5**
	INK	SAFETY GLASS / SUPER MIRROR BLACK	PAGE **6**
	VIO	SAFETY GLASS / TURQUOISE BLUE	PAGE **6**
	ART	LAMINATE / REDDEN WOOD 4604	PAGE **6**
	LAM	LAMINATE / AMAZON 3113 P	PAGE **6**
OPERATING PANELS	**PANELLS**		PAGE **7**
	EPISODE		PAGE **7**
	FLEXLINE		PAGE **7**
	7000 SERIES		PAGE **7**
LAYOUTS	**SSA**	SINGLE ENTRANCE / SIDE / AUTOMATIC DOOR	PAGE **8**
	DSA	DOUBLE ENTRANCE / SIDE / AUTOMATIC DOOR	PAGE **9**
ORDER FORM			PAGE **10**



ELEVA E LINE newly designed machineroom-less elevator system for residential buildings.

ELEVA E LINE lift systems are designed to optimise the necessary shaft dimensions.

In addition to reliability and high performance, the **ELEVA E LINE** gearless drive achieves impressively low energy comsumption.

ELEVA E LINE system complies with latest directives and norms.

ELEVA E LINE lift system is Pre-engineered with range from 320 Kg (4 prs) up to 1.275 Kg (16 prs) Rated Load.

ELEVA E LINE system offers :

- Minimized shaft dimensions
- Minimized headroom height
- Minimized pit height
- Wide range of door types and finishings.
- Wide range of car models and finishes.
- Staged Delivery by modules.
- Optimized packing for low transport costs
- High energy efficiency
- Low maintenance costs.
- Short installation time
- Automatic or Swing door availibility.
- Single or Double entrance (180^{o})

ELEVA E LINE

MACHINE ROOMLESS ELEVATOR SYSTEM

components

GEARLESS MOTOR


OVERSPEED GOVERNOR

CAR SLING

TRACTION ROPES

C.WEIGHT SLING

OPERATING PANELS

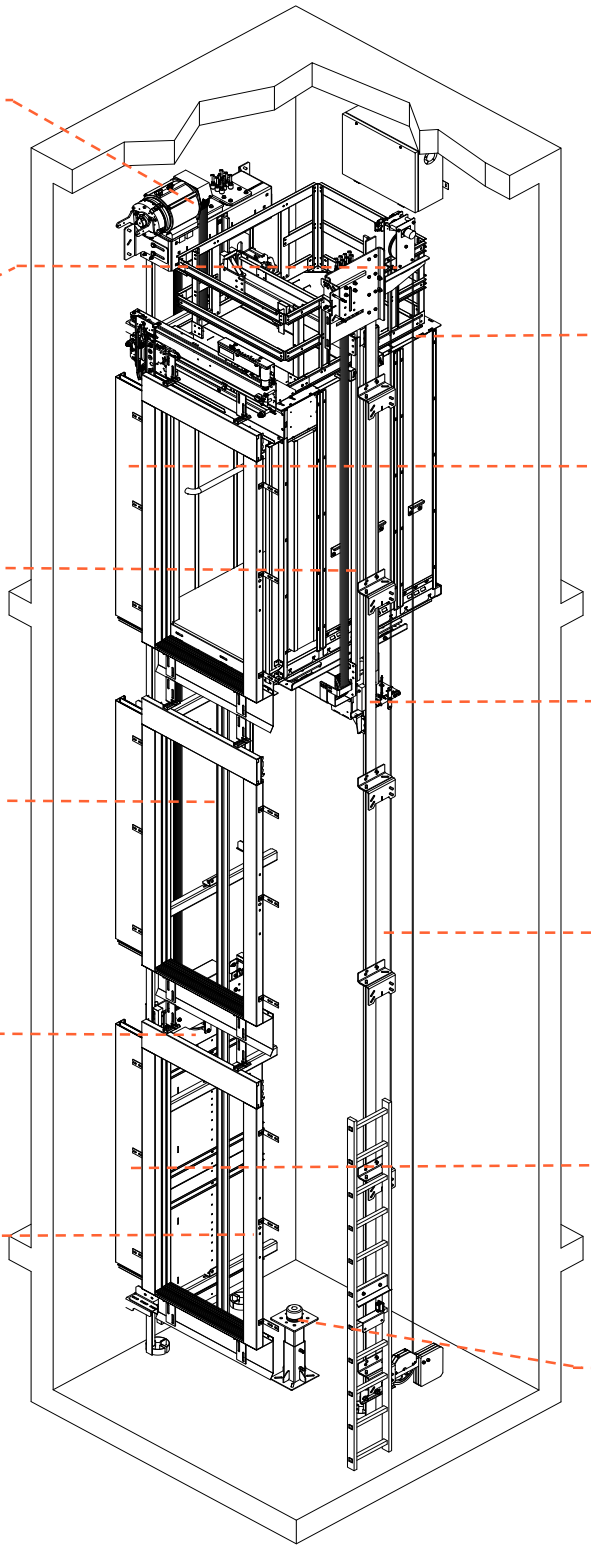

CABIN

CONTROLLER

SAFETY GEAR

GUIDE RAILS

AUTOMATIC DOORS

BUFFERS

ELEVA E LINE

MACHINE ROOMLESS ELEVATOR SYSTEM

select your car model

EVA BEO



EVA MIA



EVA LIN



EVA ZEN



EVA INK



EVA VIO



EVA ART



EVA LAM




ELEVA E LINE


MACHINE ROOMLESS ELEVATOR SYSTEM

select your operating panel model


PANELL S

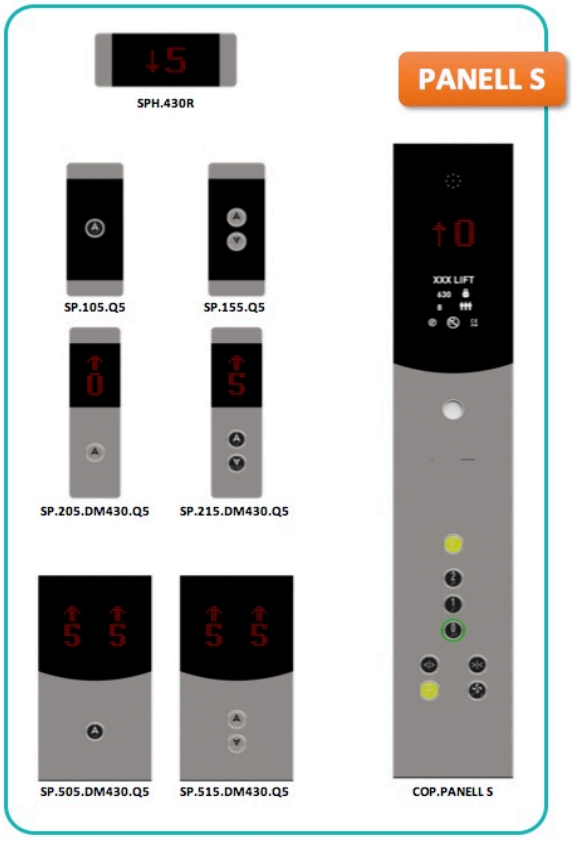


EPISODE

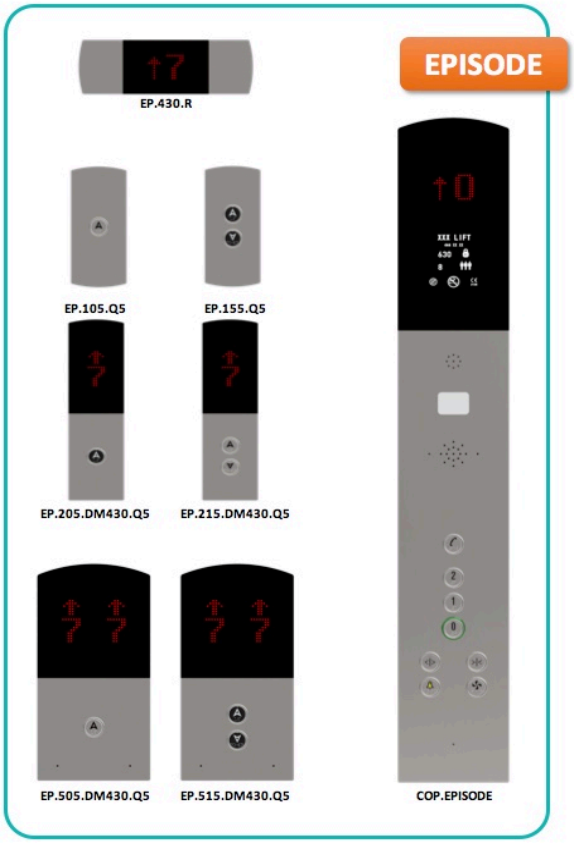

FLEXLINE

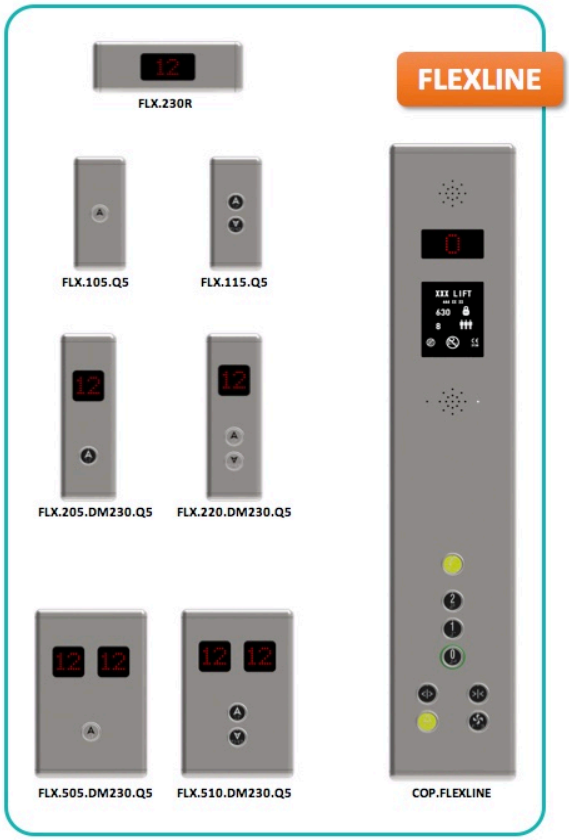

7000 SERIES

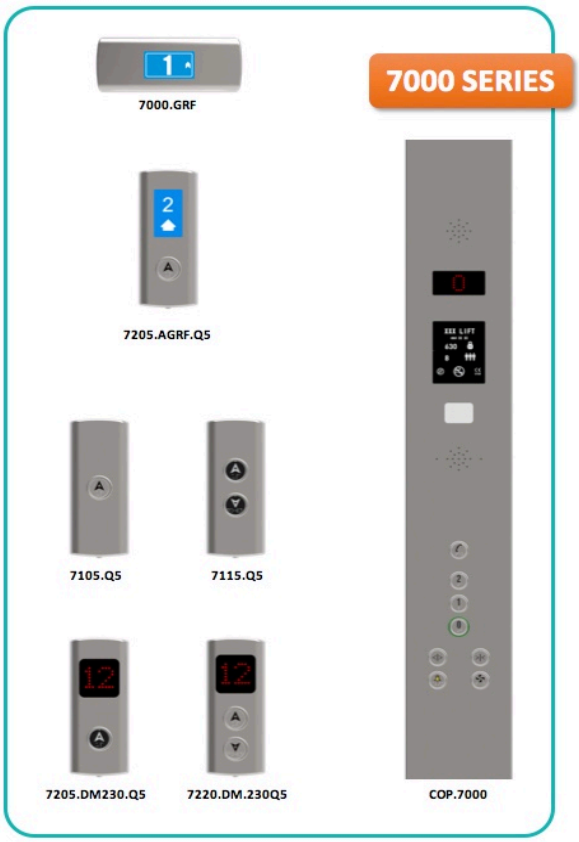



ELEVA E LINE

technical planning

SINGLE ENTRANCE / SIDE / AUTOMATIC DOOR

SSA



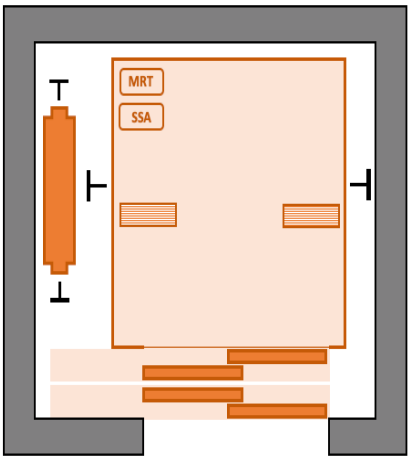

RATED LOAD	320 Kg - 1.275 Kg
MAXIMUM TRAVEL	100 m
MAX. NR. OF STOPS	30
SUSPENSION	MRT - 1 :2
CAR INTERNAL HEIGHT	2.150 mm
DOOR HEIGHT	2.000 mm / 2.100 mm
DOORS TYPE	AUTOMATIC / 2 PANELS
LAND. DOOR SERIE	HYDRA / AUGUSTA EVO / ELITE
CAR DOOR SERIE	HYDRA PLUS / ELITE

NORMS	EN 81.1		EN 81.20	
RATED SPEED	1.00 m/s	1,60 m/s	1.00 m/s	1,60 m/s
MIN. HEADROOM *	3.300 mm	3.430 mm	3.460 mm	3.615 mm
MIN. PIT HEIGHT *	1.100 mm	1.250 mm	1.300 mm	1.400 mm

RATED LOAD		CAR WIDTH CIW	CAR DEPTH CID	CAR AREA m^2	SHAFT WIDTH SW	SHAFT DEPTH SD	MAX. DOOR WIDTH PL	
320 Kg	**A**	900 mm	1.000 mm	0,90 m^2	1.460 mm	1.380 mm	700 mm	R/L
	B	1.000 mm	900 mm	0,90 m^2	1.560 mm	1.280 mm	700 mm	R/L
400 Kg	**A**	1.100 mm	1.000 mm	1,10 m^2	1.660 mm	1.380 mm	800 mm	R/L
	B	1.000 mm	1.100 mm	1,10 m^2	1.560 mm	1.480 mm	800 mm	R/L
450 Kg	**A**	1.000 mm	1.200 mm	1,20 m^2	1.570 mm	1.580 mm	800 mm	R/L
	B	1.000 mm	1.250 mm	1,25 m^2	1.570 mm	1.630 mm	800 mm	R/L
630 Kg	**A**	1.100 mm	1.400 mm	1,54 m^2	1.670 mm	1.780 mm	900 mm	R/L
	B	1.200 mm	1.300 mm	1,56 m^2	1.770 mm	1.680 mm	900 mm	R/L
	C	1.300 mm	1.200 mm	1,56 m^2	1.870 mm	1.580 mm	900 mm	R/L
	D	1.400 mm	1.100 mm	1,54 m^2	1.970 mm	1.480 mm	900 mm	R/L
800 Kg	**A**	1.350 mm	1.400 mm	1,89 m^2	1.940 mm	1.750 mm	900 mm	C
	B	1.250 mm	1.500 mm	1,88 m^2	1.840 mm	1.850 mm	900 mm	C
	C	1.400 mm	1.350 mm	1,89 m^2	1.990 mm	1.700 mm	900 mm	C
	D	1.450 mm	1.300 mm	1,89 m^2	2.040 mm	1.650 mm	900 mm	C
1.000 Kg	**A**	1.100 mm	2.100 mm	2,31 m^2	1.680 mm	2.480 mm	900 mm	R/L
	B	1.300 mm	1.750 mm	2,28 m^2	1.880 mm	2.130 mm	900 mm	R/L
	C	1.600 mm	1.400 mm	2,24 m^2	2.340 mm	1.750 mm	1.100 mm	C
	D	1.750 mm	1.300 mm	2,28 m^2	2.330 mm	1.680 mm	1.100 mm	C
1.275 Kg	**A**	1.100 mm	2.500 mm	2,75 m^2	1.920 mm	2.880 mm	1.100 mm	R/L
	B	1.200 mm	2.300 mm	2,76 m^2	2.020 mm	2.680 mm	1.100 mm	R/L

* Headroom and Pit Height might be reduced depending of the project.

ELEVA E LINE


technical planning

DOUBLE ENTRANCE / SIDE / AUTOMATIC DOOR

DSA



RATED LOAD	320 Kg - 1.275 Kg
MAXIMUM TRAVEL	100 m
MAX. NR. OF STOPS	30
SUSPENSION	MRT - 1 :2
CAR INTERNAL HEIGHT	2.150 mm
DOOR HEIGHT	2.000 mm / 2.100 mm
DOORS TYPE	AUTOMATIC / 2 PANELS
LAND. DOOR SERIE	HYDRA / AUGUSTA EVO / ELITE
CAR DOOR SERIE	HYDRA PLUS / ELITE

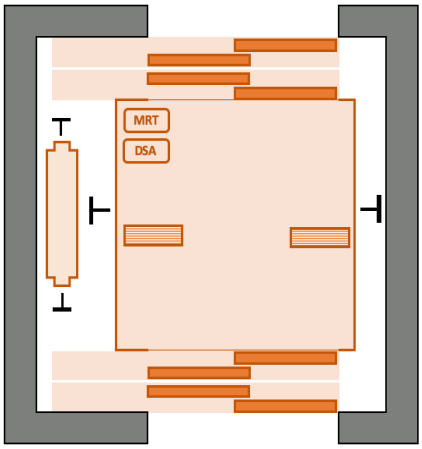

NORMS	EN 81.1		EN 81.20	
RATED SPEED	1.00 m/s	1,60 m/s	1.00 m/s	1,60 m/s
MIN. HEADROOM *	3.300 mm	3.430 mm	3.460 mm	3.615 mm
MIN. PIT HEIGHT *	1.100 mm	1.250 mm	1.300 mm	1.400 mm

RATED LOAD		CAR WIDTH CIW	CAR DEPTH CID	CAR AREA m^2	SHAFT WIDTH SW	SHAFT DEPTH SD	MAX. DOOR WIDTH PL	
320 Kg	A	900 mm	1.000 mm	0,90 m^2	1.460 mm	1.560 mm	700 mm	R/L
	B	1.000 mm	900 mm	0,90 m^2	1.560 mm	1.370 mm	700 mm	R/L
400 Kg	A	1.100 mm	1.000 mm	1,10 m^2	1.660 mm	1.560 mm	800 mm	R/L
	B	1.000 mm	1.100 mm	1,10 m^2	1.560 mm	1.660 mm	800 mm	R/L
450 Kg	A	1.000 mm	1.200 mm	1,20 m^2	1.570 mm	1.760 mm	800 mm	R/L
	B	1.000 mm	1.250 mm	1,25 m^2	1.570 mm	1.810 mm	800 mm	R/L
630 Kg	A	1.100 mm	1.400 mm	1,54 m^2	1.670 mm	1.960 mm	900 mm	R/L
	B	1.200 mm	1.300 mm	1,56 m^2	1.770 mm	1.860 mm	900 mm	R/L
	C	1.300 mm	1.200 mm	1,56 m^2	1.870 mm	1.760 mm	900 mm	R/L
	D	1.400 mm	1.100 mm	1,54 m^2	1.970 mm	1.660 mm	900 mm	R/L
800 Kg	A	1.350 mm	1.400 mm	1,89 m^2	1.940 mm	1.900 mm	900 mm	C
	B	1.250 mm	1.500 mm	1,88 m^2	1.840 mm	2.000 mm	900 mm	C
	C	1.400 mm	1.350 mm	1,89 m^2	1.990 mm	1.850 mm	900 mm	C
	D	1.450 mm	1.300 mm	1,89 m^2	2.040 mm	1.800 mm	900 mm	C
1.000 Kg	A	1.100 mm	2.100 mm	2,31 m^2	1.680 mm	2.660 mm	900 mm	R/L
	B	1.300 mm	1.750 mm	2,28 m^2	1.880 mm	2.310 mm	900 mm	R/L
	C	1.600 mm	1.400 mm	2,24 m^2	2.340 mm	1.900 mm	1.100 mm	C
	D	1.750 mm	1.300 mm	2,28 m^2	2.330 mm	1.830 mm	1.100 mm	C
1.275 Kg	A	1.100 mm	2.500 mm	2,75 m^2	1.920 mm	3.060 mm	1.100 mm	R/L
	B	1.200 mm	2.300 mm	2,76 m^2	2.020 mm	2.860 mm	1.100 mm	R/L

* Headroom and Pit Height might be reduced depending of the project.

ELEVA E LINE

MACHINE ROOMLEES ELEVATOR SYSTEM

DATE _____
CUSTOMER REF. _____
REQUESTED DELIVERY DATE _____

☐ OFFER REQUEST ☐ ORDER

QUANTITY	☐ 1 unit	☐ 2 units	☐ _____ units	
STANDARDS	☐ EN 81.20/50	☐ EN 81.70	☐ _____	
RATED LOAD	☐ 400 Kg	☐ 450 Kg	☐ 630 Kg	
	☐ 800 Kg	☐ 1.000 Kg	☐ _____ Kg	
RATED SPEED	☐ 1.00 m/s	☐ 1.60 m/s	☐ _____ m/s	
NUMBER OF FLOORS	☐ 2	☐ 3	☐ 4	☐ _____
NUMBER OF STOPS	☐ 2	☐ 3	☐ 3	☐ _____
ENTRANCES	☐ 1	☐ 2 (180°)		

DIMENSIONS

- TRAVEL [TH] _____ mm
- SHAFT WIDTH [WW] _____ mm
- SHAFT DEPTH [WD] _____ mm
- HEADROOM [HH] _____ mm
- PIT DEPTH [PH] _____ mm

DOORS TYPE	☐ HYDRA	☐ ELITE	☐ AUGUSTA
DOOR EXECUTION	☐ EN 81 / STD	☐ EN 81.58 / E 120	
DOOR OPENING	☐ TELESCOPIC	☐ CENTRAL	
DOOR PANELS	☐ 2 PANELS	☐ 3 PANELS	☐ _____
DOOR WIDTH [PL]	☐ 800 mm	☐ 900 mm	☐ _____ mm
DOOR HEIGHT [LH]	☐ 2.000 mm	☐ 2.100 mm	☐ _____ mm
LANDING DOOR CLADDING	☐ RAL 7032	☐ S.STEEL A 304 / SATIN	
		☐ S.STEEL A 304 / LINEN	
		☐ _____	
CAR DOOR CLADDING	☐ RAL 7032	☐ S.STEEL A 304 / SATIN	
		☐ S.STEEL A 304 / LINEN	
		☐ _____	

CAR MODEL	☐ EKO	☐ MIA	☐ LAM	☐ INK
	☐ ART	☐ BEO	☐ VIO	☐ ZEN
	☐ LIN	☐ LUX	☐ NUD	☐ _____

REQUESTED CAR DIMENSIONS

- WIDTH [CIW] _____ mm
- DEPTH [CID] _____ mm
- HEIGHT [CIH] _____ mm

CEILING TYPES	☐ C 01	☐ C 02	☐ C 03	☐ C 04
	☐ C 05	☐ C 06	☐ C 07	☐ C 08
	☐ C 09	☐ C 10	☐ C 11	☐ _____
NATURAL GRANITE	☐ B. CARRERA	☐ S. GALAXY	☐ BLUE PEARL	
	☐ C. BONITO	☐ WITHOUT	☐ _____	
CONTROL SYSTEM	☐ ARCODE	☐ ELEVA DRIVE	☐ WITHOUT	
CONTROL TYPE	☐ FULL COLLECTIVE	☐ DOWN COLLECTIVE		
	☐ SIMPLEX	☐ DUPLEX	☐ _____	
CABINET TYPES	☐ ALL IN ONE	☐ SLIM PANEL + SHAFT CABINET		
CABINET FINISHING	☐ RAL 7302	☐ S.STEEL / SATIN		
OPERATING PANELS	☐ PANELLS	☐ FLEXLINE	☐ 7000 SERIES	
	☐ EPISODE	☐ WITHOUT	☐ _____	
INDICATORS (LIP)	☐ LCD	☐ TFT	☐ WITHOUT	
OPTIONS	☐ SHAFT LIGHTING			
	☐ _____			
	☐ _____			

NOTES _____

SIGNATURE / STAMP / DATE